



# Superheater™ Heat Recovery Units

Efficiently recover heat and save energy

**Heat exchanger and water storage tank** — one complete unit requires less installation time.

**Stainless steel exterior** — requires little maintenance and reduces the potential for corrosion.

**Magnesium anode rod in each unit** — protects the internal tank from minerals for longer tank life.


**Recovers up to 60% of the heat rejected by the condensing unit** — preheats water coming into the hot water heater and lowers water heating costs, saving energy.

**Laser-welded heat exchanger** — burst pressure is 30% greater than resistant spot welds for longer heat exchanger life.

**Two sizes available** — either 80 gal. or 119 gal. — choose the unit to fit your dairy for optimal energy savings. Multiple units can be used together for larger operations.

**Fully insulated tank** — reduces heat loss from heated water for additional energy savings.

**Safety relief valve included with unit** — protects water storage tank from excessive pressures.

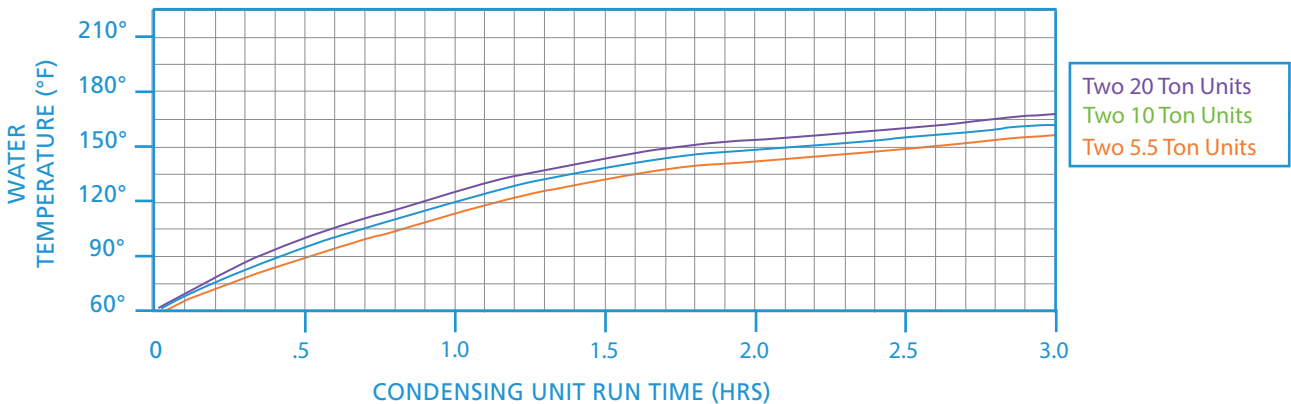

The performance graph above shows the approximate temperature of water in the storage tank.

### GEA North America

GEA Farm Technologies, Inc.  
1880 Country Farm Drive, Naperville, IL 60563  
Toll Free: 1.877.WS.DAIRY or 1.877.973.2479

GEA Farm Technologies Canada Inc.  
4591 boulevard St-Joseph, Drummondville, QC J2A 0C6  
Toll Free: 1.877.WS.DAIRY or 1.877.973.2479

gea.com